

CYCLE - VER05

01-04-2011

MOISTURE PERMEABLE COATING

Moisture permeable coating cycle suitable for wet surfaces.

Preparation of the surface

Old substrates will have to be solid, flat, absorbent, and not polluted by oils, cleaning agents, powders or other substances.


For the brand new concrete substrates, the seasoned time must be respected. Choose the most convenient mechanical preparation: abrasion or grinding.

Application

1. Apply by roller a layer of **ECOFONDO**, diluted in water at 15% (weight), for a consumption of around 0,30 kg/m² of product A+B+C.
2. After 48 hours, apply by roller a layer of **PAVIWATER**, diluted in water at 30%, for a consumption of 0,130 kg/m² of product A+B.
3. Apply roller a second layer of **PAVIWATER**, diluted with water at 10%, for a consumption of 0,130 kg/m² of product A+B.

Inert granulates can be added into the **PAVIWATER** in order to obtain an anti-slip surface.

The final thickness of the coating is around 150 micron.

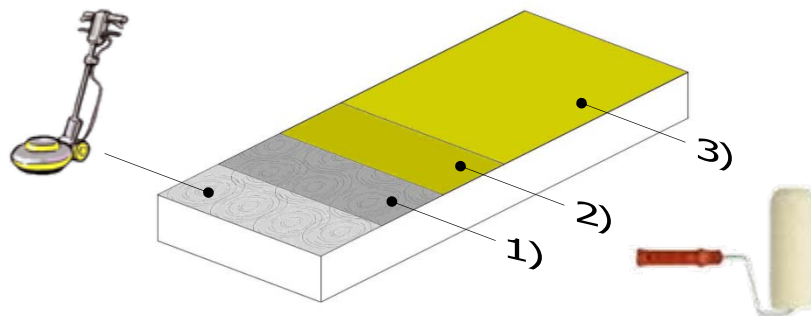

Warnings

If the base is particularly absorbing or dusty, apply as primer by roller, one layer of PAVIWATER T68, diluted in the ratio 1 to 3 with water and with a consumption of 0,05 kg/m², and then execute the above cycle.

Products

ECOFONDO A+B+C: waterborne 3 component epoxy coating

PAVIWATER A+B: waterborne epoxy coating

PAVIWATER T68 A+B: waterborne transparent epoxy resin

